



FOR IMMEDIATE RELEASE
July 27, 2026

CONTACT: Jack Hughes, Project Engineer
517.853.4470 | hughes@meridian.mi.us

ADDENDUM #2
Sanitary Sewer Rehabilitation 2026

Addendum #2 includes Two (2) revised contract pages: AD-1, P-2, One revised Appendix: APX-C, and Two (2) revised Plan Sheets: 10/21, 21/21.

Please note: you must sign this addendum and include it with your proposal.

This addendum is intended to change a 10" Sectional CIPP liner into a full-segment CIPP liner and make a correction to the diameter of the sewers shown on Sheet 10 of the plan set. One additional sewer line was added to the project scope on Sheet 10.

General

- 1) The bid date remains Friday, July 31st at 11:00AM.

CIPP Installation

- 2) A 36" diameter segment of sanitary sewer on Sheet 10 was corrected to be 24" after a field survey. One additional 24" CIPP lining segment was added to the project scope in CIPP Priority Index #2, shown on Sheet 10.
 - a. The total amount of 24" CIPP lining is 665 LF. The corrected amount of 36" CIPP lining is one segment of 110 feet.
- 3) The 10" CIPP Sectional Liner(s) called for on Sheet 21 have been converted into a full-segment CIPP lining, adding 290' of 10" CIPP lining.
- 4) Due to the additional 5 sanitary leads on this section of 10" main, 5 Laterals have been added to Item 22b, *Sewer, Lateral Connection, Grouting* and 20 gallons have been added to the estimate of Item 20q, *Sewer, Material, Grout*.
- 5) The number of currently known runners/gushers for each sewer segment has been added to the CIPP Index. The treatment of these (or any leaks which may interfere with the CIPP lining process) is included in the respective CIPP line items.

Date	_____	Company Name	_____
By	_____	Address	_____
	Signature		
	_____		_____
	Printed Name		
Title	_____	Phone Number	_____
		Email Address	_____

Addendum #2

The community of Meridian Township is in close proximity to the Michigan State Capitol and Michigan State University. The Township serves the community through exceptional services, beneficial amenities and an outstanding quality of life. It is a welcoming community that celebrates quality education, recreation and lifestyles.

AM-1



MERIDIAN TOWNSHIP
SANITARY SEWER REHABILITATION 2026

ADVERTISEMENT FOR BIDS

Sealed proposals will be received by Meridian Township, Ingham County, Michigan, at the Meridian Township Clerk's Office, Municipal Building, 5151 Marsh Road, Okemos, Michigan, 48864-1198, Ph. (517) 853-4000, up to **11:00 a.m., local time on July 31st, 2026** for the rehabilitation of sanitary sewer mains and manholes, after which time, proposals will be publicly opened and read aloud.

Bids are solicited on a unit price basis. The work involves the following major bid items:

- Approximately **11,440** feet of 8-, 10-, 12-, 18-, **24-** and 36-inch Cured-In-Place Pipe (CIPP) liner;
- Approximately **2,100** feet of 8-, 10-, 21- and 24-inch mainline joint grouting;
- Grouting approximately **160** lateral connections;
- Various Rehabilitation Techniques on 72 manholes; and,
- Bypass Pumping

Proposals shall include the furnishing of all labor, material, and equipment to complete the project.

Work on the project may commence any time after issuing the Notice to Proceed and shall be complete by August 1st, 2027. Sanitary Sewers on Priority List 1 must be lined by November 1st 2026. No work will be permitted between November 1st 2026 and March 15th of 2027.

Each proposal shall be accompanied by a certified check or a bid bond by a recognized surety company similar to a U.S. Government Standard form bid bond, in the amount of five percent (5%) of the bid, payable to the Meridian Township, Ingham County, Michigan as security for the acceptance of the Contract.

Insurance and bonds are required from the successful bidder for this project; please see pages GC-2 thru GC-3 for those requirements. *Please note Owner/Contractors Protective Liability is required for all of our contracts.* The contract documents may be examined at the following locations:

- Meridian Township, Dept of Public Works, 5151 Marsh Road, Okemos, MI 48864
- Builders Exchange of Lansing & Central MI, 1240 E. Saginaw St., Lansing, MI 48906-5522
- Construction Assoc of MI, 43636 Woodward, Bloomfield Hills, MI 48302
- Dodge Data & Analytics, 2521 E. Michigan Avenue, Lansing, MI 48912-4010

Copies of the contract documents for the work may be obtained from the Department of Public Works & Engineering at 5151 Marsh Road, Okemos, Michigan, for a non-refundable fee of ten dollars (\$10). There is a five dollar (\$5.00) fee for mailing contract documents. Contract documents may be obtained via email free of charge. Questions regarding this contract may be addressed to Meridian Township Department of Public Works & Engineering by phone at (517) 853-4440, or by email at DPW@meridian.mi.us.

The Vendor's agreement to pay prevailing wage rates is one relevant consideration that Meridian Township may make in its determination of which bidder should receive this contract. Meridian Township may thus consider in awarding this contract whether any vendor voluntarily pays employees and sub-contractors, directly upon the site of work, at least the prevailing wages and fringe benefits as determined and published by the United States Department of Labor for the Ingham County area.

In submitting this bid, it is understood that the right is reserved by the Owner to reject any or all bids, to award the Contract to other than the low bidder, to award separate contracts for each project and/or phase, to waive irregularities and/or formalities, and in general, to make award in any manner deemed by it, in its sole discretion, to be in the best interest of the Owner.

Copies of the inspection reports and videos for the project are available upon request. Please contact DPW@meridian.mi.us for a link to these items.

SANITARY SEWER REHABILITATION 2026
PROPOSAL

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>QTY</u>	<u>UNIT</u>	<u>UNIT PRICE</u>	<u>AMOUNT</u>
1.	Traffic Control	1	LSum	\$ _____	\$ _____
10a.	Mobilization, 2026	1	LSum	\$ _____	\$ _____
10b.	Mobilization, 2027	1	LSum	\$ _____	\$ _____
20a.	Sewer, CIPP, 8 inch	6625	Ft	\$ _____	\$ _____
20b.	Sewer, CIPP, 10 inch	3270	Ft	\$ _____	\$ _____
20c.	Sewer, CIPP, 12 inch	320	Ft	\$ _____	\$ _____
20d.	Sewer, CIPP, 18 inch	450	Ft	\$ _____	\$ _____
20d2.	Sewer, CIPP, 24 inch	665	Ft	\$ _____	\$ _____
20e.	Sewer, CIPP, 36 inch	110	Ft	\$ _____	\$ _____
20f.	Sewer, Sectional CIPPR, 8 inch	4	Ea	\$ _____	\$ _____
20g.	Sewer, Joint Air Test, 8 inch	154	Ea	\$ _____	\$ _____
20h.	Sewer, Joint Air Test, 10 inch	206	Ea	\$ _____	\$ _____
20i.	Sewer, Joint Air Test, 21 inch	36	Ea	\$ _____	\$ _____
20j.	Sewer, Joint Air Test, 24 inch	26	Ea	\$ _____	\$ _____
20k.	Sewer, Joint Grouting, 8 inch	139	Ea	\$ _____	\$ _____
20m.	Sewer, Joint Grouting, 10 inch	186	Ea	\$ _____	\$ _____
20n.	Sewer, Joint Grouting, 21 inch	33	Ea	\$ _____	\$ _____
20p.	Sewer, Joint Grouting, 24 inch	24	Ea	\$ _____	\$ _____
20q.	Sewer, Material, Grout	2620	Gal	\$ _____	\$ _____
21a.	Manhole, Grouting, Fully Sealed	18	Ea	\$ _____	\$ _____
21b.	Manhole, Liner	372	VFt	\$ _____	\$ _____
21c.	Manhole, Grout Pipe Connection	4	Ea	\$ _____	\$ _____
21d.	Manhole, Rebuild Chimney, Pavement	8	Ea	\$ _____	\$ _____
21e.	Manhole, Rebuild Chimney, Offroad	4	Ea	\$ _____	\$ _____
22a.	Sewer, Lateral Connection, Air Test	25	Ea	\$ _____	\$ _____
22b.	Sewer, Lateral Connection, Grouting	158	Ea	\$ _____	\$ _____
23a.	Bypass Pumping, Residential	1	LSum	\$ _____	\$ _____
23b.	Bypass Pumping, Railway Crossing, Culvert	3	Ea	\$ _____	\$ _____
23c.	Bypass Pumping, Railway Crossing, No Culvert	1	Ea	\$ _____	\$ _____
54.	Site Restoration	1	LSum	\$ _____	\$ _____


TOTAL BID:\$ _____

MAINLINE TREATMENT - CIPP INDEX - PRIORITY 1

US MH	Depth (ft)	DS MH	Depth (ft)	Sheet #	Street Name	Diameter (in)	Type	Length (ft)	Laterals
28-209	12.5	28-32	14.4	11	Sower Blvd	18	RCP	295	0
28-32	14.4	28-31	18.8	11	White Owl Way (Offroad)	18	RCP	155	0
Pvt	9	28-55	9.5	20	Okemos Rd	8	VCP	75	0
28-109	10.5	28-108	11.1	12	Hulett Rd	8	VCP	170	0
26-160	7.8	26-159	13.1	13	Breakwater Dr <i>Sectional CIPP</i>	8 357 ft Downstream	VCP	5	0
26-160	7.8	26-159	13.1	13	Breakwater Dr <i>Sectional CIPP</i>	8 384 ft Downstream	VCP	5	0
6-116	9.0	6-117	11.2	4	Carino Ct <i>Sectional CIPP</i>	8 99ft Downstream	VCP	5	0
5-57	8.1	5-58	7.3	5	Briarwick Dr <i>Sectional CIPP</i>	8 199 ft Downstream	VCP	5	0

MAINLINE TREATMENT - CIPP INDEX - PRIORITY 2

US MH	Depth (ft)	DS MH	Depth (ft)	Sheet #	Street Name	Diameter (in)	Type	Length (ft)	Laterals	Known 'Runners'
9-27	8.4	9-26	14.4	6	Haslett Road	8	VCP	370	5	
9-26	14.5	9-25	13.5	6	Haslett Road	8	VCP	345	5	
9-25	13.5	9-24	11.2	6	Haslett Road	8	VCP	345	2	
9-24	11.2	9-23	9.8	6	Haslett Road	8	VCP	350	6	
9-23	9.8	9-22	8.7	6	Haslett Road	8	VCP	375	8	
9-22	8.8	9-21	8.4	6	Haslett Road	8	VCP	325	4	
9-21	8.5	9-20	10.5	6	Haslett Road	8	VCP	320	4	
9-20	10.6	9-19	10.9	6	Haslett Road	8	VCP	335	7	
9-19	10.9	9-18	11.0	6	Haslett Road	8	VCP	310	6	
9-18	11.0	9-17	11.3	6	Haslett Road	8	VCP	315	6	
9-17	11.4	9-6	11.8	6	Haslett Road	8	VCP	320	2	3
9-48	21.2	9-49	21.2	7	Lac du Mont Drive	10	RCP	265	5	1
5-21	9.9	5-22	11.5	5	Skyline Dr	8	VCP	340	9	
5-22	11.5	5-23	11.4	5	Skyline Dr	8	VCP	350	4	1
5-23	11.4	5-24	11.6	5	Skyline Dr	8	VCP	215	4	
5-24	11.6	5-25	8.5	5	Skyline Dr	8	VCP	185	4	2
5-59	6.6	5-152	6.0	3	Birch Row Dr	10	VCP	150	0	1
5-152	6.0	5-67	6.1	3	Birch Row Dr	10	VCP	95	0	
5-67	6.1	6-180	5.8	3	Birch Row Dr	10	VCP	240	0	
6-180	5.8	6-181	5.6	3	Birch Row Dr	10	VCP	90	0	
6-181	5.6	6-29	6.8	3	Birch Row Dr	10	VCP	135	1	
6-29	6.8	6-28	7.9	3	Birch Row Dr	10	VCP	255	0	1
6-28	8.0	6-30	9.1	3	Birch Row Dr	10	VCP	235	5	1
6-134	7.9	6-28	7.7	3	Birch Row Dr	8	VCP	355	1	1
6-34	13.2	6-35	11.8	3	Birch Row Dr	8	VCP	235	4	
6-35	11.8	6-36	11.3	3	Birch Row Dr	8	VCP	210	5	1
5-30	14.0	5-34A	12.0	5	Margate Ln	10	VCP	205	2	
5-34A	12.0	5-34	12.2	5	Margate Ln	10	VCP	230	4	
5-34	12.2	5-43	11.4	5	Margate Ln	10	VCP	225	2	1
6-158	13.2	6-185*	14.5	4	Biber St	12	VCP	320	4	2
<i>Manhole 6-185 shown as 6-190 on Plans</i>										
5-49	9.4	5-48	11.6	5	Horizon Dr	8	VCP	345	8	
11-37	12.4	11-42	11.4	9	Carlton St	10	VCP	225	5	1
11-42	11.4	11-43	8.9	9	Carlton St	10	VCP	180	4	1
11-43	8.9	11-44	7.4	9	Carlton St	10	VCP	120	1	4
11-44	7.4	11-45	9.2	9	Carlton St	10	VCP	265	0	3
11-45	9.2	11-1	11.5	9	Carlton St	10	VCP	65	0	2
11-55	9.8	11-1	10.2	9	Carlton St	8	VCP	305	0	1
26-95	11.5	26-96	9.3	13	Shoals Dr	8	VCP	130	1	
10-43	8.3	15-2	14.4	10	Interurban (Offroad)	24	RCP	325	0	
15-2	14.4	15-3	12.5	10	Nemoke Trail (Offroad)	36	RCP	110	0	
15-3	12.5	15-4	14.0	10	Nemoke Trail (Offroad)	24	RCP	330	0	
17-12	8.1	17-13	8.1	21	Heather Dr	10	VCP	290	5	

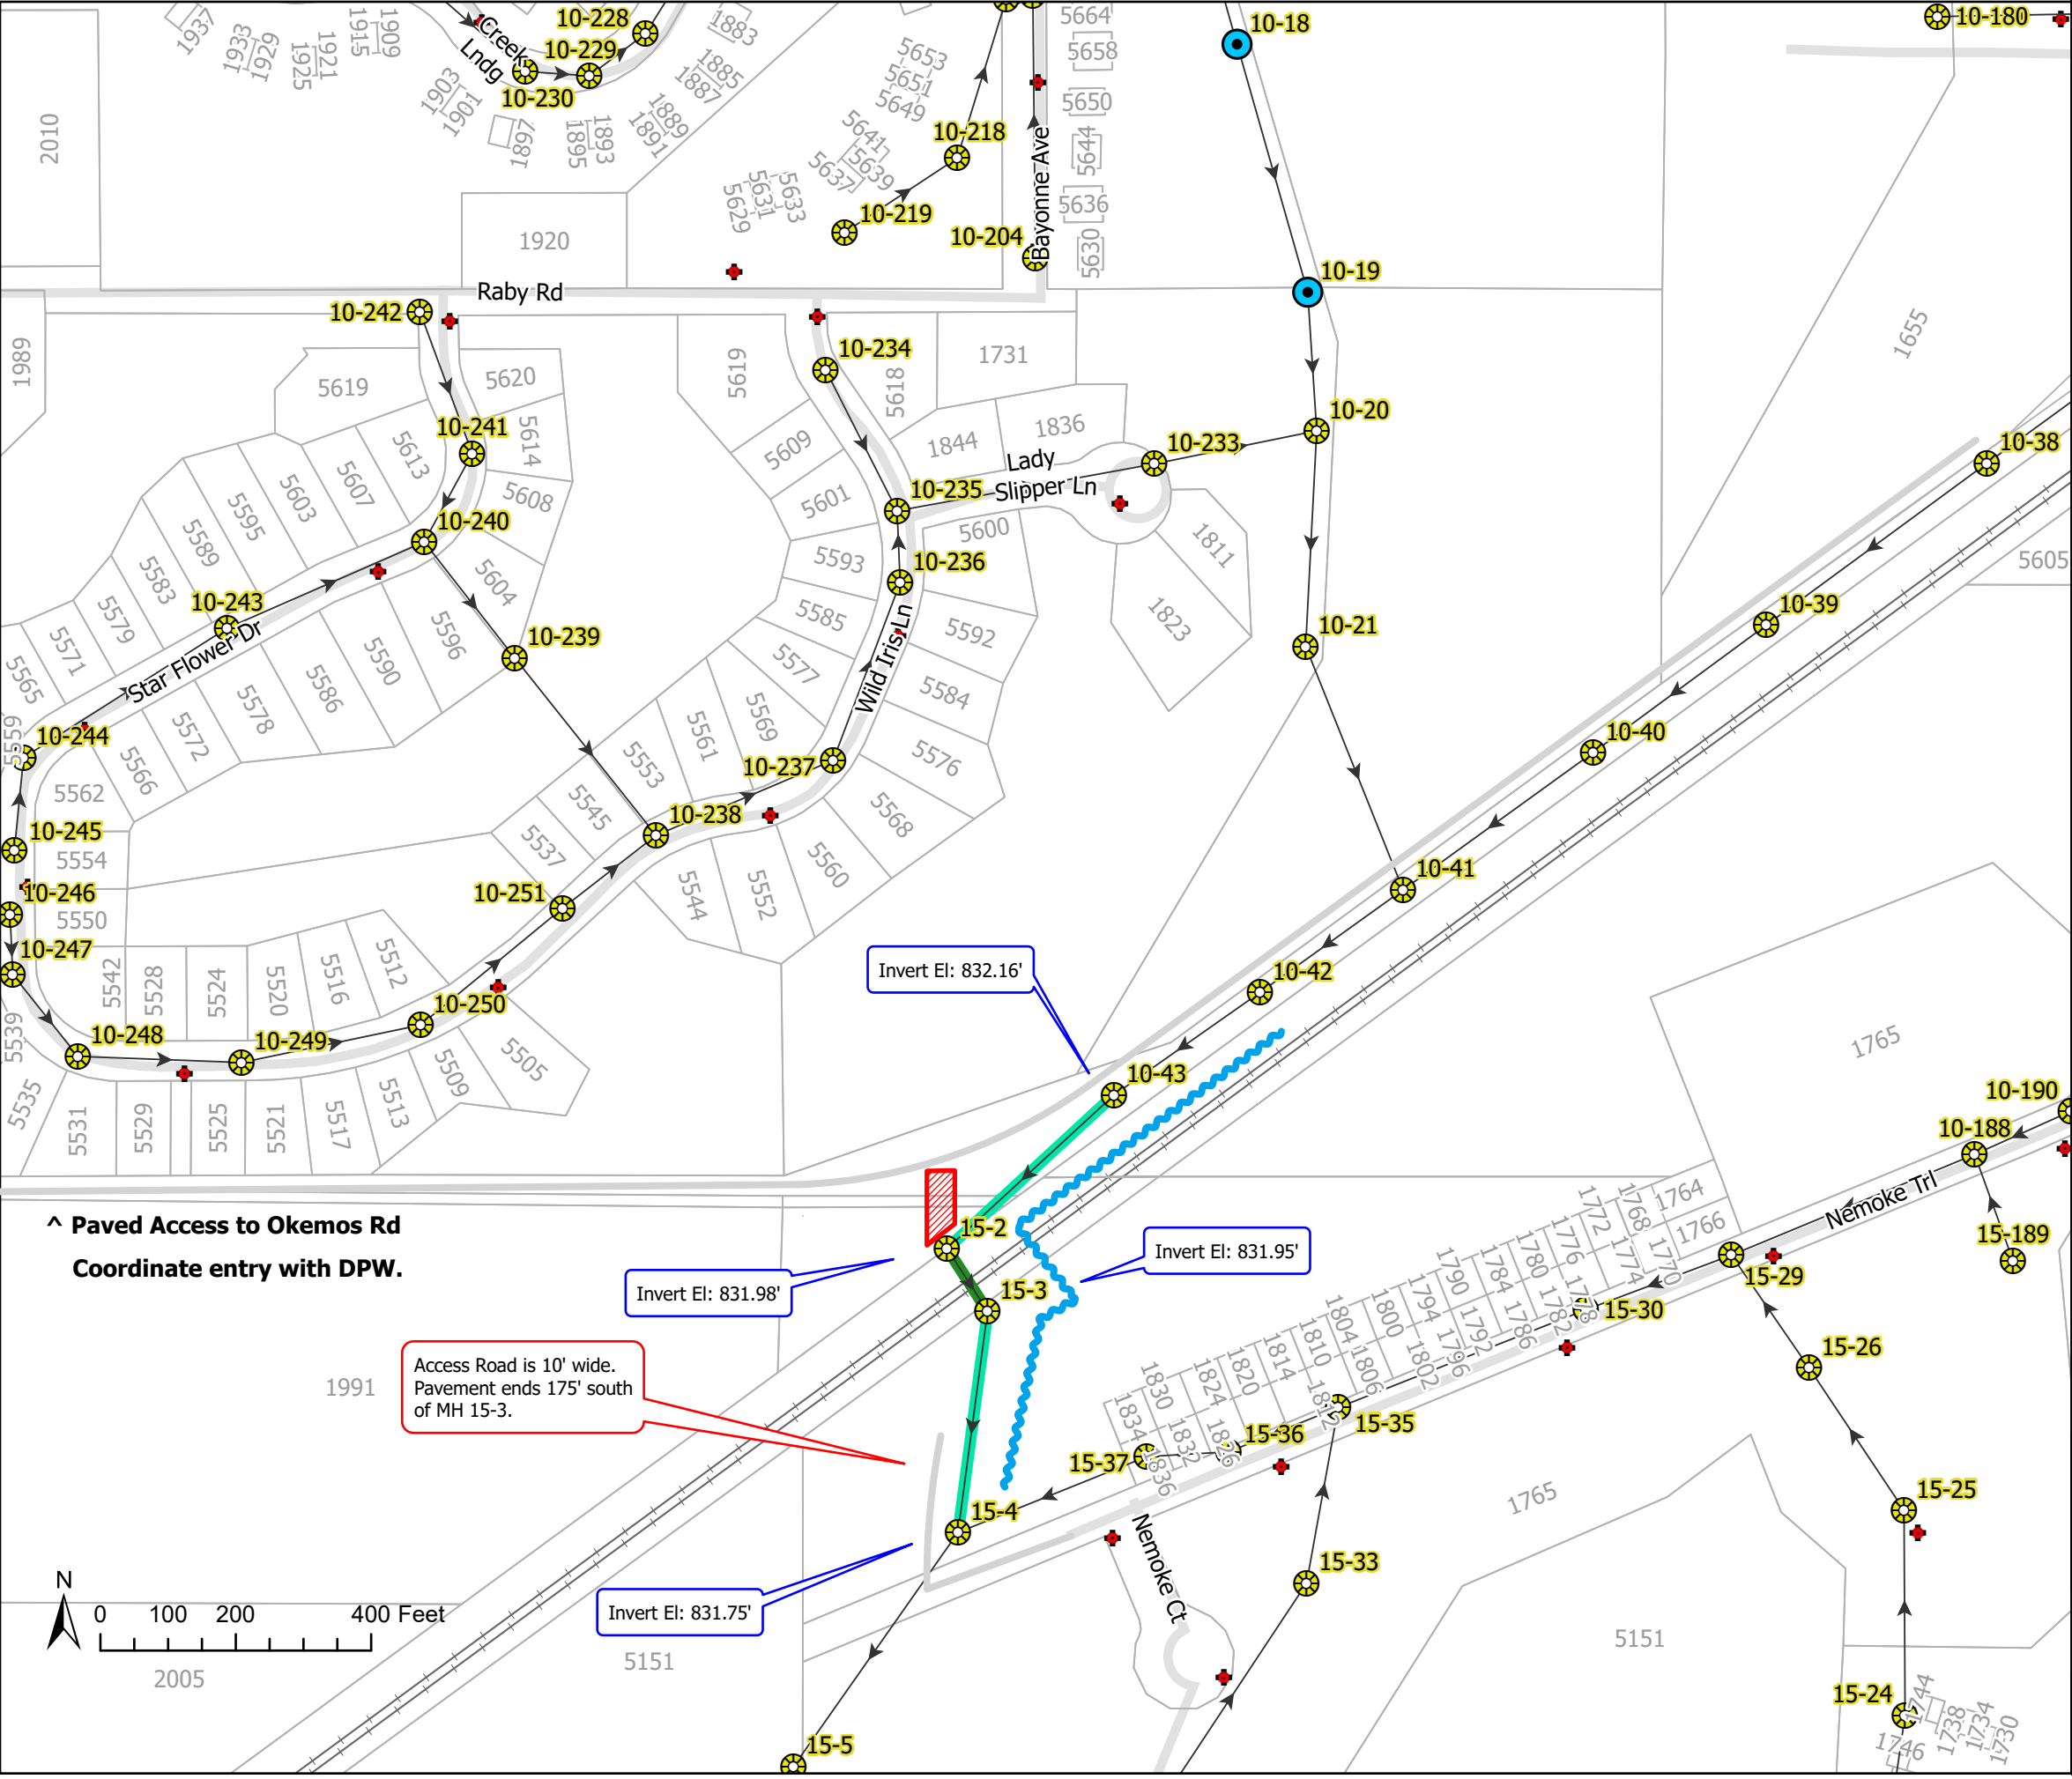


Rehab Quantities:

 Sewer, CIPP, 24"	665 LF
 Sewer, CIPP, 36"	110 LF
 Manhole, Liner	2 EA

 Suggested Bypass Route
(Through Culvert)

 Tree and Brush Removal
(Approximate)

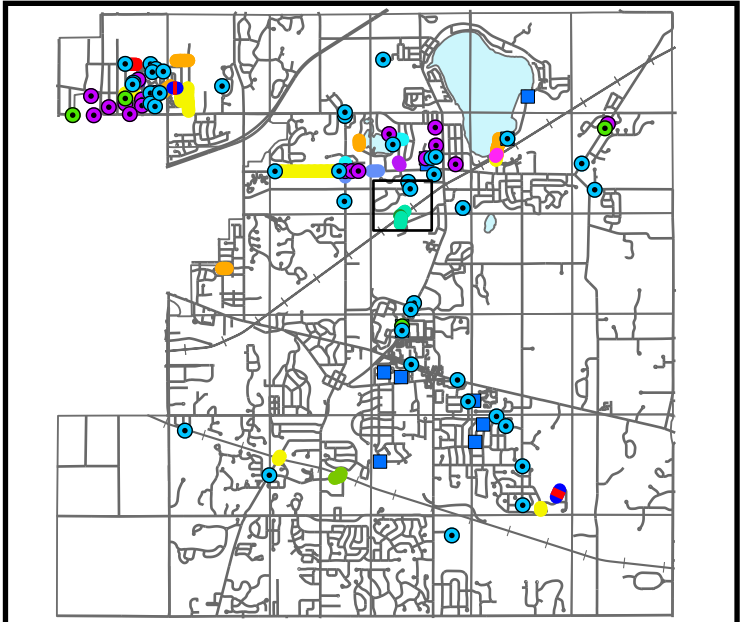

Meridian Charter Township
Ingham County, Michigan
Sanitary Sewer System

7/1/2026	JH	Bid Plans
7/20/2026	JH	Addendum #1
7/24/2026	JH	Addendum #2


SANITARY SEWER REHABILITATION 2026
Interurban Trail

SHEET
10/21



Rehab Quantities:

Sewer, CIPP, 10" 290 LF

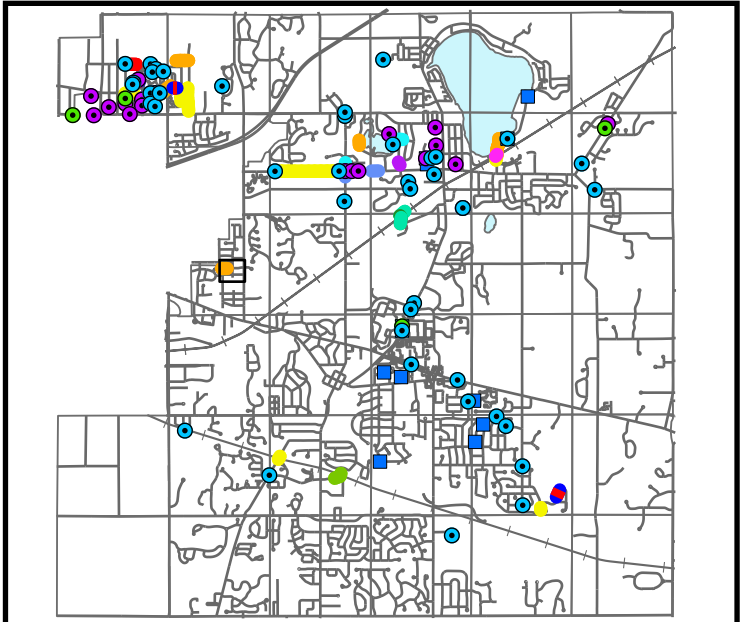

Meridian Charter Township
Ingham County, Michigan
Sanitary Sewer System

7/1/2026	JH	Bid Plans
7/20/2026	JH	Addendum #1
7/24/2026	JH	Addendum #2

SANITARY SEWER REHABILITATION 2026

Heather Dr

SHEET
21/21